

SGM MAGNETICS

Enquiry form



Billets & bars

General Information:

Company name		
Person to contact		
Position		
E-mail address		
Phone no.		Fax no.
Address		
Your SGM Contact	Name:	Email
	Phone no.	Fax no.


Application:

<input type="checkbox"/> Hot mill / cooling bed	<input type="checkbox"/> Storage area
<input type="checkbox"/> Port	<input type="checkbox"/> Other, please specify:

Specifications:

<input type="checkbox"/> Regular billets	<input type="checkbox"/> Beam blanks	<input type="checkbox"/> Bars
--	--------------------------------------	-------------------------------

Length	Min.	mm/inches	Max.	mm/inches
Section	Min.	mm x mm/"x"	Max.	mm x mm/"x"
Max. weight of the billet layer	Min.	kg/lbs.	Max.	kg/lbs.
Flange size of dog bone billets	Min.	mm/inches	Max.	mm/inches
Number of billets to be lifted	Qty.	Per section		
	Qty.	Per section		
	Qty.	Per section		
Temperature	<input type="checkbox"/> Ambient		<input type="checkbox"/> Hot (>150°C/300°F)	
For hot billets/bars only				
Standard surface temperature	°C/°F			
Maximum surface temperature	°C/°F			
Standard time per magnet lifting cycle	seconds			
Standard quantity of lifts per hour				
Maximum lifts per hour				
Caster capacity per hour	Metric tons/hr (US tons/hr)	
Are there any stops in operation?	<input type="checkbox"/> No	<input type="checkbox"/> Yes, every	time for	time
Billet/bar straightness:				
<input type="checkbox"/> Good				




SGM MAGNETICS

Enquiry form




Else, maximum deflection within the 3 central meters (10 feet) mm/inches

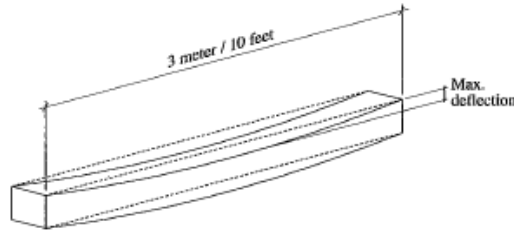

Crane specifications:


Crane rated voltage	<input type="checkbox"/> Vac <input type="checkbox"/> Vdc	
Crane working environment	<input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor	
Crane type and capacity		
<input type="checkbox"/> Single hoist	<input type="checkbox"/> Two hoists (set distance)	<input type="checkbox"/> Two independent hoists

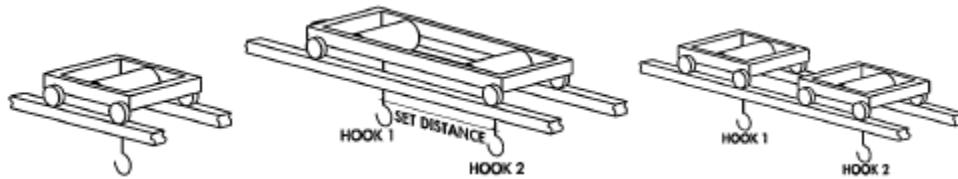

Capacity	Metric tons	Capacity 1	Metric tons	Capacity 1	Metric tons
		Capacity 2	Metric tons	Capacity 2	Metric tons
		Set distance	mm/inches		

Remarks:

Preferred solution:		
<input type="checkbox"/> Electro-magnet	<input type="checkbox"/> Battery back-up requested	
<input type="checkbox"/> Electro-permanent magnet		
<input type="checkbox"/> No preference		
Cable reel:		
<input type="checkbox"/> Not requested	<input type="checkbox"/> Requested, stroke	meters/feet
Lifting area environment:		
<input type="checkbox"/> From cooling bed		
<input type="checkbox"/> Billet yard		
<input type="checkbox"/> Truck loading		
<input type="checkbox"/> Else, please specify		



SGM

SGM MAGNETICS

Enquiry form



Notes:

SGM Group

Belgium, Germany, Italy

Great Britain, Middle East, Mexico, China, India, U.S.A

www.sgmmagnetics.com